REDWAY POWER®

OEM / ODM LITHIUM BATTERY

12.8V 8Ah 102.4Wh LiFePO4 Lithium Battery

Redway OEM/ODM Lithium Battery

Redway specializes in providing a diverse selection of battery sizes and configurations to cater to a wide range of applications. Whether you need standard battery options or have unique power requirements, our team of experienced engineers is here to assist you throughout the entire process of designing, developing, testing, and manufacturing custom battery solutions tailored to your specific needs. Feel free to reach out to us today to learn more about our comprehensive range of battery solutions, OEM/ODM and how we can create a customized solution for you.

Battery Features

- Long Cycle Life
- High Quality Lithium Cells
- · Safety Smart BMS Protection



REDWAY POWER®

OEM / ODM LITHIUM BATTERY






Specifications		More	
Lithium Cell Types	LiFePO4 (LFP)	Dimensions (L*W*H)	151 x 65 x 95 mm
Nominal Voltage	12.8V	Weight	~0.9 kg
Nominal Capacity	8Ah	Charge Temperature	0°C ~ 60°C
Nominal Energy	102.4Wh	Discharge Temperature	-20°C ~ 60°C
Max Charge Voltage	14.6V	Storage Temperature	0°C ~ 45°C
Discharge Cut-off Voltage	10V	Battery Case	ABS
Max Charge Current	8A (Continuous)	Silkscreen / Label / Laser	Yes
Max Discharge Current	10A (Continuous)	Charger	Optional
Peak Discharge Current	-	Certification	UL 1642 / IEC 62619 / CE / UN38.3 / MSDS
Max Parallel Connection	Nonsupport	BMS Protection	Overcharge / Overdischarge / Overcurrent / Overvoltage /
Cycle Life	>6000 cycles (80% DOD)		Low Voltage / Over Temperature / Short Circuit / etc.
IP Rating	IP65	Optional Upgrades	Self-heating / Bluetooth / App / 4G / GPS / RS485 / CAN-bus
Terminal	T2		RS232 / LCD Display / Active Balance / Heatsink / etc.


REDWAY POWER®

OEM / ODM LITHIUM BATTERY

Discharge Test

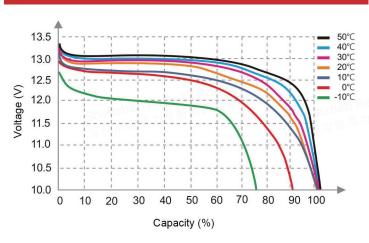

Cycle Life Test

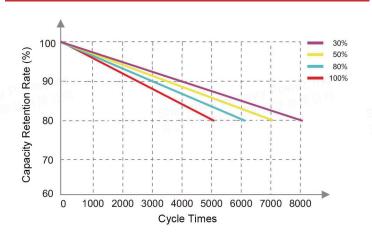

Cautions

Please use a matching charger, inverter or solar controller for charging.


Please keep good ventilation and heat dissipation.

Keep battery away from children, fire, heat sources and it is strictly forbidden to be thrown into the fire.

Pay attention to water, prevent the battery from being drenched or immersed in water.

Improper use and installation will void the warranty.

Self-discharge Test

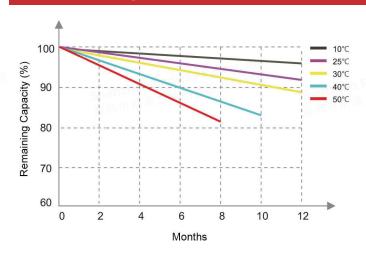

SOC Test

